CLASSIC REPRINT SERIES

User's Manual for Interactive Sloan (Arterial Case)

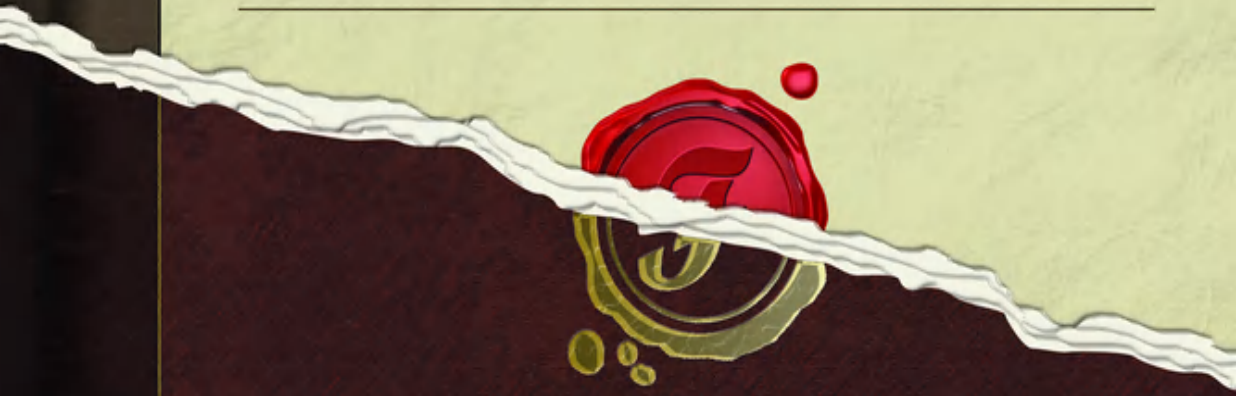

by
Matthew D. Steele

Forgotten Books

User's Manual for Interactive Sloan (Arterial Case)

by

Matthew D. Steele

Published by Forgotten Books 2013

PIBN 1000880628

www.ForgottenBooks.org

eBook Terms & Conditions

www.forgottenbooks.org

1. This eBook* may be

a. Distributed without modification or sale.

b. Copied for personal and educational use.

c. Printed for personal and educational use.

2. This eBook* may NOT be

a. Sold individually or as part of a package.

b. Modified in any way.

c. Reversed-engineered.

FB &c Ltd, Dalton House, 60 Windsor Avenue, London SW19 2RR
Company number 08720141. Registered in England and Wales.

*'eBook' refers to this PDF and any of its content including pages and images in either electronic or printed form.

Alchemy

"In changing the base metals into gold and silver by the projection of the Stone, it follows (by an accelerated process) the method of nature, and therefore is natural."

The New Pearl of Great Price, by Peter Bonus, 1338 AD

WORKING PAPER
ALFRED P. SLOAN SCHOOL OF MANAGEMENT

USER'S MANUAL for Interactive MAXBAND

(Arterial Case)

by

Matthew D. Steele

WP#1178-80 December 1980

MASSACHUSETTS
INSTITUTE OF TECHNOLOGY
50 MEMORIAL DRIVE
CAMBRIDGE, MASSACHUSETTS 02139

USER'S MANUAL for Interactive MAXBAND

(Arterial Case)

by

Matthew D. Steele

WP#1178-80 December 1980

Abstract

MAXBAND is a computer program that finds traffic signal settings to maximize bandwidths on arteries.

This manual describes an interactive version of MAXBAND that runs on a PRIME 400 computer at the Sloan School of Management, M.I.T. Inputs are arterial geometry, signal splits, range of acceptable cycle lengths, ranges of acceptable speeds and left turn phasing patterns permitted. The outputs produced are bandwidths, cycle length, beginning and ending times of splits and greenband at each signal, link speeds and space-time diagrams. The manual describes how the user gets onto the computer and uses the program. Traces are presented for two sample sessions; one using a printing terminal to solve a short artery (5-signals), and another using a graphics terminal to solve a longer artery (11-signals).

This version of MAXBAND lacks two features found in a batch program developed for the FHWA: the calculation of green splits from link flows and the ability to handle triangular networks.

CHAPTER 1

Introduction

The manner in which traffic signals are set affects large numbers of people every day. It is therefore desirable to be able to set signals well and to be able to do so quickly and easily.

MAXBAND is a computer program that finds traffic signal settings on arteries so as to achieve maximal bandwidth. Problems are formulated as mixed integer programs based on a theory developed by Little [1966;1977].

This user's manual describes a particularly convenient interactive version of MAXBAND written in EXPRESS, a high level computer language. The mixed integer program is solved using a mathematical programming package written in FORTRAN by Land and Powell [1973]. A previous interactive version written in EXPRESS was implemented by Rizzi [1977], and a batch program version written in FORTRAN has been prepared for the Federal Highway Administration by Little and Kelson [1980]. The latter contains two features not present in the on-line version; namely, the ability to calculate splits from link flows and the ability to handle simple triangular networks.

The program is currently available on the PRIME 400 minicomputer located at the Sloan School of Management, M.I.T. The program could be implemented on any facility which supports EXPRESS, for example, the TYMSHARE IBM/370 network which currently offers EXPRESS on a national basis.

System inputs include:

1. Arterial geometry
2. Signal splits
3. Range of acceptable cycle lengths
4. Ranges of acceptable speeds
5. Left turn phasing patterns permitted

Outputs include:

1. Bandwidth in each direction
2. Cycle length
3. Beginning and ending times of splits and greenband at each signal
4. Speeds on links
5. Space-time diagrams

It is recommended that problems with 10 or less signals be run on-line, while larger problems (up to 15 signals) should be run under batch operations since it takes several hours to solve such problems on the PRIME. Batch operations require documentation not provided in this manual. To obtain such documentation, contact the East Campus Computing Facilty at the Sloan School of Management.

Anyone who would like to solve a problem on an experimental basis should contact John D. C. Little at the Sloan School of Management, M.I.T., Cambridge, MA 02139, (617) 253-3738.

CHAPTER 2

Inputs

Most users will not require the full generality of the program. Therefore, a standard problem will be defined as one that (1) has a single outbound design speed and associated tolerance and a single inbound design speed and tolerance, (2) has the limit on speed change from one link to the next fixed at 10 per cent of the design speed, and (3) has no band advances for queue clearance in either direction at any signal.

A symmetric problem will be defined as one in which all the inbound data is exactly the same as the outbound data; hence, the program only asks for the outbound data.

A general problem has no limitations on any of the inputs.

The following few pages contain filled out input forms for a symmetric case, a standard case and a general case. Chapter 4 gives complete traces for running the first two of these problems. Blank input forms for all cases appear in Appendix A.

The computer starts by asking for the following information which the user provides as applicable:

Artery name
System of units - Metric or English
Number of signals
Signal names
Type of system - asymmetric or symmetric
Outbound distance between signals
Cycle time range
Outbound design speed
Outbound tolerance on design speed
Outbound limit on speed change from previous link
Outbound red/green splits
Outbound band advance (for queue clearing, if applicable)

If the user has indicated a symmetric case, the input is finished. Otherwise (standard or general case) he provides the following additional data as applicable:

Inbound distance between signals
Inbound design speed
Inbound tolerance on design speed
Inbound limit on speed change from previous link
Outbound left turn splits
Inbound red/green splits
Inbound left turn splits
Inbound band advance
Desired ratio of inbound to outbound greenbands
Left turn pattern selection

It should be pointed out that left turn green times are only used in the asymmetric (standard or general) case.

MAXBAND

Standard Artery

(1) Name of artery: Main St. Waltham Ma Number of signals 11

(2) Cycle time: Lower limit 60 (seconds). Upper limit 100 (seconds).

(3) Outbound speed: Design center 30 ~~mph~~ kph. Tolerance ± 3 ~~mph~~ kph.

(4) Inbound speed: Design center 30 ~~mph~~ kph. Tolerance ± 3 ~~mph~~ kph.

(5) Target ratio of inbound to outbound band width: 1.0

(6) Signal name (down = outbound)	(7) Distance from previous signal (meters ~~feet~~)	(8) Thru green outbound (fraction of cycle)	(9) Thru green inbound (fraction of cycle)	(10) Left turn green outbound (fraction of cycle)	(11) Left turn green inbound (fraction of cycle)	(12) Acceptability of Left Turn Patterns (1 = acceptable, 0 = not) Outbound LT before green and inbound LT before green (a)	Outbound LT before green and inbound LT after green (b)	Outbound LT after green and inbound LT before green (c)	Outbound LT after green and inbound LT after green (d)
1 Banks	xxxxxx	.6875	.5375	.15	0	1		1	
2 Prospect	247	.4375	.4375	0	0	0		0	
3 Bacon	537	.7125	.575	.1375	0	1		1	
4 Exchange	220	.75	.75	0	0	0		0	
5 Moody	244	.325	.325	0	0	0		0	
6 Lexington	110	.6625	.3875	.275	0	1		1	
7 Elm	70	.6625	.3875	.275	0	1		1	
8 Appleton	258	.75	.75	0	0	0		0	
9 Lyman	125	.5875	.5875	0	0	0		0	
10 Winter	104	.4625	.4625	0	0	0		0	
11 Linden	320	.65	.45	.2	0	1		1	
12									
13									
14									
15									

Notes by item number: (3) (4) If no tolerance specified, ±10% is assumed as a default. A limit on change in speed between signals equal to the tolerance is assumed. (5) Actual ratio will be target ratio unless larger band width is at its limit and smaller can be further increased, in which case it will be. (12) If only outbound has left turn phases, fill in (a) and (c); if only inbound, (a) and (b). Other columns are 0.

MAXBAND

Symmetric Artery

(1) Name of artery: Broadway, Cambridge, Ma. Number of signals 5

(2) Cycle time: Lower limit 80 (seconds). Upper limit 100 (seconds)

(3) Speed: Design center 45 (kph) ~~(mph)~~. Tolerance ± 5 (kph) ~~(mph)~~

	(4) Signal name (down = outbound)	(5) Distance from previous signal (meters) ~~(feet)~~	(6) Green time (fraction of cycle)
1	Portland	xxxxxxxx	.525
2	Windsor	305	.6
3	Columbia	168	.6375
4	Prospect	335	.4
5	Inman	183	.6
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			

Notes by item number: (3) If no tolerance is specified ± 10% of design speed is assumed. A limit on change of speed between signals equal to the tolerance is assumed.

MAXBAND

General Artery

(1) Name of artery: Wisconsin Ave., Washington, D.C. Number of signals 15

(2) Cycle time: Lower limit 60 (seconds). Upper limit 100 (seconds).

(3) Target ratio of inbound to outbound band width: 1.0

(4) Maximum number of iterations 100,000

OUTBOUND DATA

	(5) Signal name (down = outbound)	(6) Outbound distance from previous signal (meters/~~feet~~)	(7) Outbound design speed from previous signal (kph/~~mph~~)	(8) Outbound speed tolerance in (7) ± (kph/~~mph~~)	(9) Limit on outbound speed change from previous link ± (kph/~~mph~~)	(10) Thru green outbound (fraction of cycle)	(11) Left turn green for outbound (fraction of cycle)	(12) Outbound band advance for queue clearance (fraction of cycle)
1	Wiscon 1	xxxxx	xxxxx	xxxxx	xxxxx	.5	0	0
2	Wiscon 2	326	24.14	3.22	xxxxx	.6753	0	0
3	Wiscon 3	132	24.14	3.22	3.22	.5429	0	0
4	Wiscon 4	183	24.14	3.22	3.22	.6571	0	0
5	Wiscon 5	348	24.14	3.22	3.22	.4	0	0
6	Wiscon 6	101	24.14	3.22	3.22	.6571	.2571	0
7	Wiscon 7	311	24.14	3.22	3.22	.5429	0	0
8	Wiscon 8	242	24.14	3.22	3.22	.4143	0	0
9	Wiscon 9	290	24.14	3.22	3.22	.7857	0	.05
10	Wiscon 10	126	24.14	3.22	3.22	.6429	0	0
11	Wiscon 11	352	24.14	3.22	3.22	.4857	0	0
12	Wiscon 12	99	24.14	3.22	3.22	.6714	0	0
13	Wiscon 13	230	24.14	3.22	3.22	.5857	0	0
14	Wiscon 14	345	24.14	3.22	3.22	.55	.075	0
15	Wiscon 15	189	24.14	3.22	3.22	.675	0	0

Notes by item number: (3) Actual ratio will be target ratio unless smaller band can be further increased after larger has reached its limit. (4) Default = 10,000. (7) Default is all speeds equal. (8) Default is ± 10% of design speed. (9) Default is speed tolerance of (8).

General Artery (cont.)

(13) Name of Artery: Wisconsin Ave., Washington, D.C.

	(14) Signal name (down = outbound) (same as page 1)	(15) Inbound Distance from previous signal (meters ~~feet~~)	(16) Inbound design speed (kph ~~mph~~)	INBOUND DATA (17) Inbound speed tolerance in (16) ± (kph ~~mph~~)	(18) Limit on inbound speed change from previous link ± (kph ~~mph~~)	(19) Thru green inbound (fraction of cycle)	(20) Left turn green for inbound (fraction of cycle)	(21) Inbound band advance for queue clearance (fraction of cycle)
1	Wiscon1	xxxx	xxxx	xxxx	xxxx	.5	0	0
2	Wiscon2	326	24.14	3.22	xxxx	.6753	0	.05
3	Wiscon3	132	24.14	3.22	3.22	.5429	0	0
4	Wiscon4	183	24.14	3.22	3.22	.6571	0	0
5	Wiscon5	348	24.14	3.22	3.22	.4	0	0
6	Wiscon6	101	24.14	3.22	3.22	.4	0	0
7	Wiscon7	311	24.14	3.22	3.22	.5429	0	0
8	Wiscon8	242	24.14	3.22	3.22	.5714	.1571	0
9	Wiscon9	290	24.14	3.22	3.22	.7857	0	0
10	Wiscon10	126	24.14	3.22	3.22	.6429	0	0
11	Wiscon11	352	24.14	3.22	3.22	.4857	0	0
12	Wiscon12	99	24.14	3.22	3.22	.6714	0	.05
13	Wiscon13	230	24.14	3.22	3.22	.5857	0	0
14	Wiscon14	345	24.14	3.22	3.22	.475	0	0
15	Wiscon15	189	24.14	3.22	3.22	.675	0	0

Notes: (15) Default is outbound distance. (16) Default is outbound speed. (17) Default is ± 10% of design speed of (16). (18) Default is speed tolerance of (17).

General Artery (cont)

(22) Name of Artery: Wisconsin Ave., Washington, D.C.

LEFT TURN PATTERN CONSTRAINTS

(23) Signal name (down = outbound) (same as page 1)	(24) Acceptability of Left Turn Patterns (1 = acceptable, 0 = not)			
	Outbound LT before green and		Outbound LT after green and	
	inbound LT before green (a)	inbound LT after green (b)	inbound LT before green (c)	inbound LT after green (d)
1 Wiscon1	0	0	0	0
2 Wiscon2	0	0	0	0
3 Wiscon3	0	0	0	0
4 Wiscon4	0	0	0	0
5 Wiscon5	0	0	0	0
6 Wiscon6	1	0	1	0
7 Wiscon7	0	0	0	0
8 Wiscon8	1	1	0	0
9 Wiscon9	0	0	0	0
10 Wiscon10	0	0	0	0
11 Wiscon11	0	0	0	0
12 Wiscon12	0	0	0	0
13 Wiscon13	0	0	0	0
14 Wiscon14	1	0	1	0
15 Wiscon15	0	0	0	0

Notes: (24) Default condition is that all left turn patterns are acceptable. If only outbound has left turn phases, fill in (a) and (c); if only inbound, (a) and (b). Other columns are 0.

CHAPTER 3

Using the Computer

SECTION 3.1

Logging into the PR1ME

Interactive MAXBAND exists on a PR1ME 400 minicomputer located at the Sloan School of Management and can be reached by dialing:

617-258-6008

One must obtain a login username and password. After calling and getting connected to the computer, hit the carriage return (for the rest of this user's manual, <cr> means hit the carriage return). The computer will then print

login please

Hit return again, and the computer will print a password mask. Then type (in capital letters)

LOGIN username password <cr>

If you get double images, type

TERM -HALF <cr>

If you get no images, type

TERM -FULL <cr>

Note: @ is the character delete and [is the line delete.

Now type

A L7LITTLE password <cr>

(Consult Professor Little for the current password.)

Next type

A L.AND.P 0 2 <cr>

SECTION 3.2

Entering EXPRESS

Now we want to get into EXPRESS, so type

DSS MAXBAND <cr>

The computer will print four lines each saying LOAD COMPLETE, then a warning message that may be disregarded. Finally the following appears

WELCOME TO MAXBAND (THE MESSAGES ABOVE ARE ALL IRRELEVANT)

If you are using a graphics terminal, you will find it helpful to read the EXPRESS plotter booklet. This will tell you how to identify the plotter you are using to the computer. For example, if you are using a Tektronix terminal, you type

TERMINAL TEKxxxx <cr>

where xxxx is replaced by the number of the terminal. In our example,

SECTION 3.4

Printing Out the Inputs

If the user types

MB.PRINT <cr>

all of the input variables are printed out.

SECTION 3.5

Solving Problem and Output

To solve a problem, type

MB.SOLVE <cr>

The program will run and tell the user how many CPU seconds each stage takes. The stages are (1) matrix generation (2) optimization by mixed integer linear program and (3) output. Chapter 4 gives examples.

If the problem has previously been solved, and only the output is desired, the user types

MB.OUTPUT <cr>

The output has two options, table and plot:

(i) Table

This produces times for the start of red, end of red, start and end of greenband, start and end of band advance. In addition the inbound and outbound speeds on links are printed. See examples for more details.

(ii) Plot

A space-time diagram for the artery showing the greenband is produced for each direction.

First the computer will print a "File created" comment and then, on a graphics terminal only, an arrow (>) will appear; the user simply hits the carriage return to produce the plot. On a printing terminal the operation is continuous.

A graphics terminal produces a better looking plot. Outputs from both types of terminal are demonstrated in the examples chapter. On a graphics terminal, the computer pauses after a plot is produced, to permit the user to make a hard copy, if desired. Hitting the return continues the program.

The user may choose either, both or neither of the two options. The program, no matter which option is used, automatically displays the cycle time and the inbound and outbound bandwidths.

SECTION 3.6

File Data / Use Data

To file the data for possible reuse at a later date, type

FILE filename DATABASE <cr>

where filename is replaced by whatever name you select for the file. After hitting the <cr>, the computer will prompt

COMMENT

Now you can type any message, e.g. a phrase identifying the problem. If more than one line is desired, a hyphen (-) followed by a <cr> at the end of a line will result in a prompt

CONTINUE

and the message can be continued.

When the data is desired once again, simply type

USE filename <cr>

SECTION 3.7

Modify Street Data

To change the current data, either just entered or brought back via a USE command, simply type

MB.INPUT <cr>

and type

NC <cr>

for any item that the user does not want to change. To terminate a

data question series in the middle, type DONE. Everything will be left as before. The modified problem can be rerun via a MB.SOLVE command. Users having experience with EXPRESS can change data variables directly, but the MB.INPUT sequence should be gone through with NC's and DONE's to be sure all flags and derived variables are correctly set.

SECTION 3.8

Restarting a Problem

If the maximum number of iterations specified by the user is not large enough to solve the entire problem, the program will terminate at the iteration limit and print out a message saying that a node (data file) has been punched (stored on disk) so that the program can be restarted at the exact point where it stopped. To do this type MB.SOLVE, enter a new (larger) maximum number of iterations and type "yes" when asked if this is a restart of a previous run.

One warning: the restart must be the next problem solved, even if it is in another computer session. If another problem is run before the problem is restarted, the node will be erased, and the original problem will have to be resolved from the beginning.

Another warning: if the user enters a maximum number of iterations that is so small that the original linear program of the mathematical program cannot be solved (iterations are simplex iterations), the program will instruct the user to resolve the problem from the beginning using a larger maximum (Note: this is not a restart). This problem can be avoided if the maximum number of iterations always exceeds 1000.

SECTION 3.9

Running Times

The following are representative running times

5-signal symmetric	5 minutes
11-signal standard	1 hour
17-signal standard	5 hours

These times were when the system was fairly empty. With more users, the running times can be much greater.

SECTION 3.10

Leaving EXPRESS

An important thing to know about EXPRESS is that the user is dealing with a database. When the user enters EXPRESS, the variables all have values. No matter whether the user enters new data or uses a USE command, if one leaves EXPRESS, the variables will be reset to their original values and the new values will be lost unless they are "updated" or else filed via a FILE command.

The user can make the current values permanent by typing

UPDATE <cr>

If one then types

EXIT <cr>

the values of the variables will be left at what they were at the last UPDATE. An UPDATE can be typed at any time in an EXPRESS session. If

there are no UPDATE's, the variables are left at their original values, i.e. those at the beginning of the EXPRESS session, when the EXIT is typed. EXIT gets the user out of EXPRESS.

A third command

QUIT <cr>

executes first an UPDATE and then an EXIT, and so it also takes the user out of EXPRESS.

SECTION 3.11

ESCAPE and BREAK Keys

If you want to stop a program in EXPRESS while it is running, press the ESCAPE key. This will stop the program and keep you within EXPRESS.

The BREAK key will throw you out of EXPRESS. The variables will be left at what their values were at the last UPDATE.

However, if the user hits the BREAK key by accident, one can recover by typing

START <cr> <cr>

as the first command after the BREAK. The program will be restored in EXPRESS at the exact place it was before the BREAK key was hit.

SECTION 3.12

Leaving the PR1ME

Once one leaves EXPRESS via an EXIT, QUIT or BREAK key, one simply types

LO <cr>

to log off the machine. Then disconnect the telephone and turn off the terminal. If using a plotter, be sure to turn off the hard copy unit, too.

EXAMPLE #1

USER TYPING IS UNDERLINED

```
login please
C>
C>LOGIN [redacted]
```

C> means you are at PRIME operating system level

```
PRIMOS Version MDS.18.0.2
L7LITTLE (5) LOGGED IN AT  15:58 80/12/01
PROJECT CODE:MATT
 *  * YOU CAN NOW PRINT FILES USING EITHER THE PRINT OR THE SPOOL COMMAND

C>CO TTY
C>A L.AND.P 0 2
C>DSS MAXBAND
LOAD COMPLETE
LOAD COMPLETE
LOAD COMPLETE
Already exists.  load over existing entry ignored (F$ERX )
LOAD COMPLETE
```

Entering EXPRESS and bringing in MAXBAND

```
   WELCOME TO MAXBAND (THE MESSAGES ABOVE ARE ALL IRRELEVANT)

TYPE MB.INPUT TO INPUT TRAFFIC DATA
TYPE MB.PRINT TO PRINT OUT INPUT TRAFFIC DATA
TYPE MB.SOLVE TO SOLVE PROBLEM AND PRINT OUT RESULTS
TYPE MB.OUTPUT TO SIMPLY PRINT OUT RESULTS OF PREVIOUSLY SOLVED PROBLEM
NOTE: MB.SOLVE AUTOMATICALLY EXECUTES MB.OUTPUT
```

```
->MR.INPUT                    → means you are at EXPRESS level.
TRAFFIC DATA INPUT
ARTERY NAME :BROADWAY
1 METRIC SYSTEM  2 ENGLISH SYSTEM >1
NUMBER OF SIGNALS >5
SIGNAL NAMES
SIG 1: >PORTLAND
SIG 2: >WINDSOR
SIG 3: >COLUMBIA
SIG 4: >PROSPECT
SIG 5: >INMAN
1 ASYMMETRIC   2 SYMMETRIC >2
OUTBOUND DISTANCE FROM PREVIOUS SIGNAL TO SIGNAL (METERS)
SIG WINDSOR: >305
SIG COLUMBIA: >168
SIG PROSPECT: >335
SIG INMAN: >183
LOWER LIMIT ON CYCLE TIME (SEC) >80
UPPER LIMIT ON CYCLE TIME (SEC) >100
DO YOU WANT DIFFERENT DESIGN SPEEDS FOR EACH OUTBOUND SIGNAL ? :NO
OUTBOUND DESIGN SPEED (KM/HR)>45
DESIGN SPEED TOLERANCE
1 DEFAULT (=10% OF DESIGN SPEED))  2 NEW VALUES >2
DO YOU WANT DIFFERENT TOLERANCES FOR EACH SIGNAL ? >NO
OUTBOUND DESIGN SPEED TOLERNCE (KM/HR)>5
LIMIT ON SPEED CHANGE FROM PREVIOUS LINK
1 DEFAULT  (=10% OF DESIGN SPEED)  2 NEW VALUES >2
DO YOU WANT DIFFERENT LIMITS ON SPEED CHANGE FROM PREVIOUS LINK FOR EACH
 SIGNAL
>NO
LIMIT ON CHANGE IN OUTBOUND SPEED FROM PREVIOUS LINK (KM/HR)>2
OUTBOUND GREEN TIME (FRACTION OF CYCLE)
SIG PORTLAND: >.525
SIG WINDSOR: >.6
SIG COLUMBIA: >.6375
SIG PROSPECT: >.4
SIG INMAN: >.6
BANDWIDTH ADVANCE
1  DEFAULT (=0)  2  NEW VALUES >1
```

```
->MB.PRINT

(STNAME)    ARTERY NAME

STNAME     BROADWAY


(NSIG)      NUMBER OF SIGNALS

NSIG              5


(T1)        LOWER LIMIT ON CYCLE TIME (SEC)
(T2)        UPPER LIMIT ON CYCLE TIME (SEC)

T1               80
T2              100


(D)         OUTBOUND DISTANCE FROM PREVIOUS SIGNAL TO SIGNAL (METERS)
(DESSPEED)  OUTBOUND DESIGN SPEEDS (KM/HR)
(TLP)       OUTBOUND DESIGN SPEED TOLERANCES (KM/HR)
(CS)        LIMITS ON CHANGE IN OUTBOUND SPEED FROM PREVIOUS LINK (KM/HR)
(GREEN)     OUTBOUND GREEN TIME (FRACTION OF CYCLE)
(EL)        OUTBOUND LEFT TURN GREEN TIME (FRACTION OF CYCLE)
(TAU)       OUTBOUND BANDWIDTH ADVANCE (FRACTION OF CYCLE)
```

SIG	D	DESSPEED	TLP	CS	GREEN	EL	TAU
PORTLAND	NA	NA	NA	NA	.525	0	0
WINDSOR	305	45	5	NA	.6	0	0
COLUMBIA	168	45	5	2	.6375	0	0
PROSPECT	335	45	5	2	.4	0	0
INMAN	193	45	5	2	.6	0	0

```
->MB.SOLVE
MAXIMUM NUMBER OF ITERATIONS
(TYPE NC TO USE THE DEFAULT SETTING OF 100000 ITERATIONS) >25
IS THIS A RESTART OF A PREVIOUS RUN? >NO

(DIFF1)     CPU SECONDS USED DURING THE MATRIX GENERATOR

DIFF1         26.71

OPTIMIZATION FINISHED

(DIFF2)     CPU SECONDS USED DURING THE OPTIMIZATION

DIFF2         29.28

THE MAXIMUM NUMBER OF ITERATIONS HAS BEEN REACHED IN THE BRANCH-AND-BOUN
D ALGORITHM.
A NODE HAS BEEN PUNCHED SO THAT YOU MAY RESTART THE PROGRAM.  Node is actually
->MB.SOLVE                                                    written to disk.
MAXIMUM NUMBER OF ITERATIONS
(TYPE NC TO USE THE DEFAULT SETTING OF 100000 ITERATIONS) >NC
IS THIS A RESTART OF A PREVIOUS RUN? >YES
OPTIMIZATION FINISHED

(DIFF2)     CPU SECONDS USED DURING THE OPTIMIZATION

DIFF2         63.22

OUTPUT VALUES IN METRIC UNITS

(ZOUT)      CYCLE TIME (SEC)

ZOUT          80.00

OUTBOUND SOLUTION

(B)         OUTBOUND BANDWIDTH (CYCLES)

B               .32
```

```
OUTPUT: 1 TABLE ONLY  2 PLOT ONLY  3 BOTH  4 NEITHER >3

(ST.RED)   START OF RED CYCLE
SIG        PORTLAND  WINDSOR COLUMBIA PROSPECT     INMAN
CYCLE
1              0.00       .54      .56       .94       .04
2              1.00      1.54     1.56      1.94      1.04
3              2.00      2.54     2.56      2.94      2.04


(END.RED)  END OF RED CYCLE
SIG        PORTLAND  WINDSOR COLUMBIA PROSPECT     INMAN
CYCLE
1               .48       .94      .92      1.54       .44
2              1.48      1.94     1.92      2.54      1.44
3              2.48      2.94     2.92      3.54      2.44


(ST.GB)    START OF GREENBAND
(END.GB)   END OF GREENBAND
(ST.ADV)   ST.GB PLUS BANDWIDTH ADVANCE
(END.ADV)  ST.ADV PLUS GREENBAND

SIG        PORTLAND  WINDSOR COLUMBIA PROSPECT     INMAN
ST.GB           .68      1.02     1.19      1.54      1.72
END.GB         1.00      1.33     1.51      1.86      2.04
ST.ADV          .68      1.02     1.19      1.54      1.72
END.ADV        1.00      1.33     1.51      1.86      2.04


(AVGSP)    AVERAGE SPEED IN GREENBAND FROM PREVIOUS SIGNAL TO SIGNAL
(KM/HR)

SIG        WINDSOR COLUMBIA PROSPECT     INMAN
AVGSP        41.01    42.40    43.89     45.49

FILE CREATED: 10/11/79 19:15:24
COMMENT: PLOT FOR 3 CYCLES
```

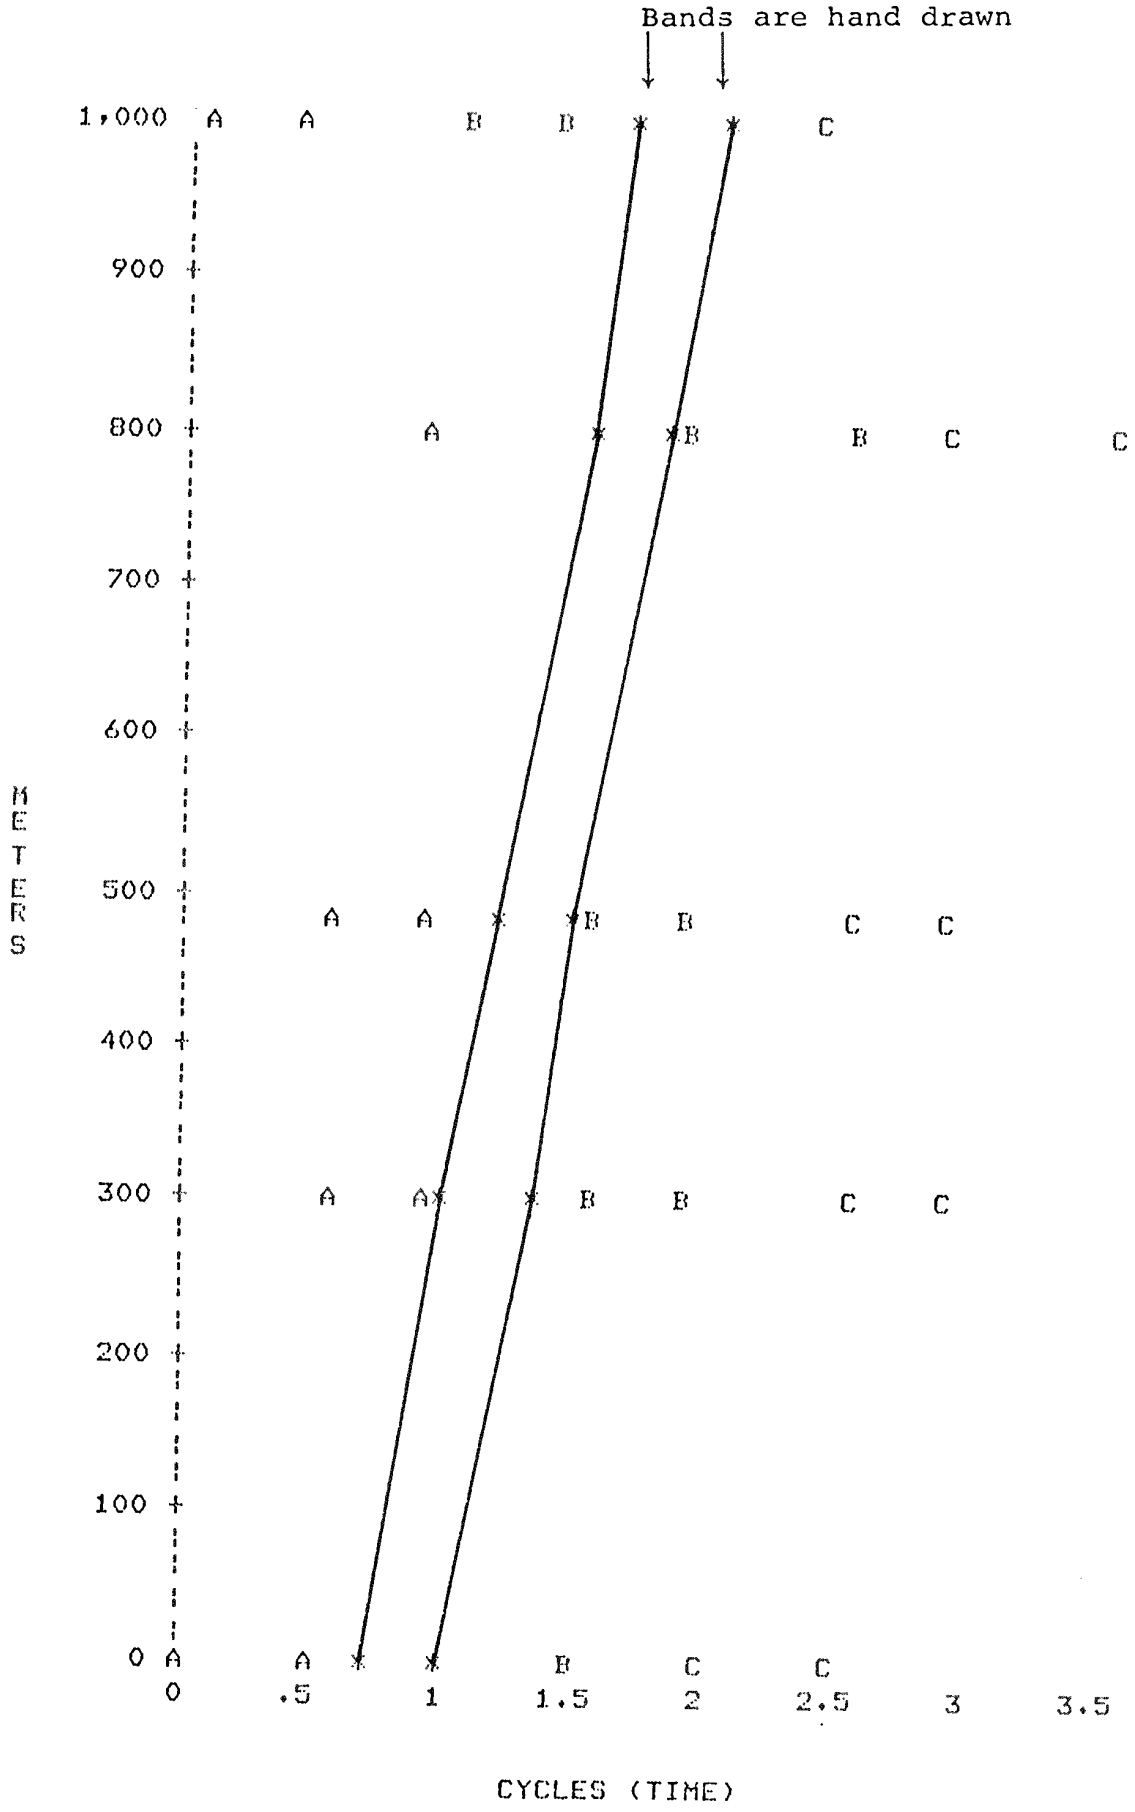
Bands are hand drawn
1,000
900
800
700
600
500
400
300
200
100
0
METERS
A
B
C
0
.5
1
1.5
2
2.5
3
3.5
CYCLES (TIME)

INBOUND SOLUTION

(BBAR) INBOUND BANDWIDTH (CYCLES)

BBAR .32

OUTPUT: 1 TABLE ONLY 2 PLOT ONLY 3 BOTH 4 NEITHER >3

(ST.RED) START OF RED CYCLE

SIG CYCLE	INMAN	PROSPECT	COLUMBIA	WINDSOR	PORTLAND
1	.04	.94	.56	.54	0.00
2	1.04	1.94	1.56	1.54	1.00
3	2.04	2.94	2.56	2.54	2.00

(END.RED) END OF RED CYCLE

SIG CYCLE	INMAN	PROSPECT	COLUMBIA	WINDSOR	PORTLAND
1	.44	1.54	.92	.94	.48
2	1.44	2.54	1.92	1.94	1.48
3	2.44	3.54	2.92	2.94	2.48

(ST.GB) START OF GREENBAND
(END.GB) END OF GREENBAND
(ST.ADV) ST.GB PLUS BANDWIDTH ADVANCE
(END.ADV) ST.ADV PLUS GREENBAND

SIG	INMAN	PROSPECT	COLUMBIA	WINDSOR	PORTLAND
ST.GB	.44	.62	.96	1.14	1.48
END.GB	.76	.94	1.28	1.46	1.79
ST.ADV	.44	.62	.96	1.14	1.48
END.ADV	.76	.94	1.28	1.46	1.79

(AVGSP) AVERAGE SPEED IN GREENBAND FROM PREVIOUS SIGNAL TO SIGNAL (KM/HR)

SIG	PROSPECT	COLUMBIA	WINDSOR	PORTLAND
AVGSP	45.49	43.89	42.40	41.01

FILE CREATED: 10/11/79 19:15:24
COMMENT: PLOT FOR 3 CYCLES

```
(DIFF3)     CPU SECONDS USED DURING THE OUTPUT ROUTINE

DIFF3          73.64

->FILE BROADWAY DATABASE          Save data on disk file
COMMENT: >BROADWAY, CAMBRIDGE EXAMPLE
->UPDATE            save data in database
->USE BROADWAY      restore data from file (Still in file!)
FILE CREATED: 12/01/80 16:28:09
COMMENT: BROADWAY, CAMBRIDGE EXAMPLE
->EXIT    Leave EXPRESS
C>LO      Leave PRIME
L7LITTLE (5) LOGGED OUT AT  16:33 80/12/01
320.7 MRUS, 0.58 HOURS (LOCAL), PROJECT=MATT
C>
```

EXAMPLE #2

USER TYPING IS UNDERLINED

```
C>LOGIN [redacted]

PRIMOS Version MDS 18.0.2
L?LITTLE (2) LOGGED IN AT  11:59 80/12/02
PROJECT CODE MATT
 *  * YOU CAN NOW PRINT FILES USING EITHER THE PRINT OR THE SPOOL COMMAN

C>CO TTY
C>A L AND P 0_2
C>DSS MAXBAND
LOAD COMPLETE
LOAD COMPLETE
LOAD COMPLETE
Already exists.  load over existing entry ignored (FSERX )
LOAD COMPLETE



   WELCOME TO MAXBAND (THE MESSAGES ABOVE ARE ALL IRRELEVANT)

TYPE MB.INPUT TO INPUT TRAFFIC DATA
TYPE MB PRINT TO PRINT OUT INPUT TRAFFIC DATA
TYPE MB.SOLVE TO SOLVE PROBLEM AND PRINT OUT RESULTS
TYPE MB.OUTPUT TO SIMPLY PRINT OUT RESULTS OF PREVIOUSLY SOLVED PROBLEM
NOTE  MB.SOLVE AUTOMATICALLY EXECUTES MB.OUTPUT

->TERMINAL TEK4013
->
```

Identify terminal (Necessary for graphics but not most printing terminals)

```
->MB INPUT
TRAFFIC DATA INPUT
ARTERY NAME >MAIN STREET, WALTHAM
1 METRIC SYSTEM  2 ENGLISH SYSTEM >1
NUMBER OF SIGNALS >11
SIGNAL NAMES
SIG 1  >BANKS
SIG 2  >PROSPECT
SIG 3  >BACON
SIG 4  >EXCHANGE
SIG 5  >MOODY
SIG 6  >LEXINGTON
SIG 7  >ELM
SIG 8  >APPLETON
SIG 9  >LYMAN
SIG 10  >NEWTON
SIG 11  >LINDEN
1 ASYMMETRIC  2 SYMMETRIC >1
OUTBOUND DISTANCE FROM PREVIOUS SIGNAL TO SIGNAL (METERS)
SIG PROSPECT  >247
SIG BACON  >337
SIG EXCHANGE  >230
SIG MOODY  >244
SIG LEXINGTO  >110
SIG ELM  >70
SIG APPLETON  >253
SIG LYMAN  >125
SIG NEWTON  >104
SIG LINDEN  >370
ARE INBOUND DISTANCES THE SAME AS OUTBOUND DISTANCES? >YES
LOWER LIMIT ON CYCLE TIME (SEC) >60
UPPER LIMIT ON CYCLE TIME (SEC) >120
DO YOU WANT DIFFERENT DESIGN SPEEDS FOR EACH OUTBOUND SIGNAL ? >
```

```
DO YOU WANT DIFFERENT DESIGN SPEEDS FOR EACH OUTBOUND SIGNAL ? >NO
OUTBOUND DESIGN SPEED (KM/HR)>30
DESIGN SPEED TOLERANCE
1 DEFAULT (=10% OF DESIGN SPEED))  2 NEW VALUES >1
LIMIT ON SPEED CHANGE FROM PREVIOUS LINK
1 DEFAULT  (=10% OF DESIGN SPEED)  2 NEW VALUES >1
ARE INBOUND DESIGN SPEEDS AND TOLERANCES THE SAME AS
OUTBOUND DESIGN SPEEDS AND TOLERANCES? >YES
ARE INBOUND LIMITS ON SPEED CHANGE FROM PREVIOUS LINK THE SAME AS
OUTBOUND LIMITS ON SPEED CHANGE FROM PREVIOUS LINK? >YES
OUTBOUND GREEN TIME (FRACTION OF CYCLE)
SIG BANKS: > .6875 .4375 .7125 .75 .375 .6625 .6625 .75 .5875 .4625 .65
DO YOU WANT ANY OUTBOUND LEFT TURN GREEN TIME ? >YES
OUTBOUND LEFT TURN GREEN TIME (FRACTION OF CYCLE)
SIG BANKS: > 10 0 .1375 0 0 .275 .275 0 0 0 .2
INBOUND GREEN TIME (FRACTION OF CYCLE)
SIG BANKS: > .5375 .4375 .575 .75 .375 .3875 .3875 .75 .5875 .4625 .45
DO YOU WANT ANY INBOUND LEFT TURN GREEN TIME ? >NO
BANDWIDTH ADVANCE
1  DEFAULT (=0)  2  NEW VALUES >1
DESIRED RATIO OF INBOUND TO OUTBOUND GREENBANDS >1

LEFT TURN PATTERN SELECTION FOR EACH SIGNAL

PATTERNS

(1) OUTBOUND LEFT TURN BEFORE GREEN AND INBOUND LEFT TURN BEFORE GREEN
(2) OUTBOUND LEFT TURN BEFORE GREEN AND INBOUND LEFT TURN AFTER GREEN
(3) OUTBOUND LEFT TURN AFTER GREEN AND INBOUND LEFT TURN BEFORE GREEN
(4) OUTBOUND LEFT TURN AFTER GREEN AND INBOUND LEFT TURN AFTER GREEN

FOR EACH SIGNAL BELOW, TYPE ONE (1) IF YOU WANT THE PATTERN IN QUESTION
TO BE CONSIDERED AND TYPE ZERO (0) IF YOU DO NOT WANT THE PATTERN
IN QUESTION TO BE CONSIDERED

LEFT TURN PATTERN FORMING MATRIX
SIG BANKS
PAT 1: >1
PAT 2: >0
PAT 3: >1
PAT 4  >0
LEFT TURN PATTERN FORMING MATRIX
SIG BACON
PAT 1: >1 0 1 0
LEFT TURN PATTERN FORMING MATRIX
SIG LEXINGTO
PAT 1: >1 0 1 0
LEFT TURN PATTERN FORMING MATRIX
SIG ELM
PAT 1: >1 0 1 0
LEFT TURN PATTERN FORMING MATRIX
SIG LINDEN
PAT 1: >1 0 1 0
->
```

Short cut on input. Just leave a space between each signal in the list. (For negative numbers, comma required.)

```
->MB PRINT

(STNAME)   ARTERY NAME

STNAME     MAIN STREET, WALTHAM


(NSIG)     NUMBER OF SIGNALS

NSIG            11


(T1)       LOWER LIMIT ON CYCLE TIME (SEC)
(T2)       UPPER LIMIT ON CYCLE TIME (SEC)

T1              60
T2             100

MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE.  SCREEN WILL
 THEN BE ERASED. >  CR
(D)        OUTBOUND DISTANCE FROM PREVIOUS SIGNAL TO SIGNAL (METERS)
(DESSPEED) OUTBOUND DESIGN SPEEDS (KM/HR)
(TLP)      OUTBOUND DESIGN SPEED TOLERANCES (KM/HR)
(CS)       LIMITS ON CHANGE IN OUTBOUND SPEED FROM PREVIOUS LINK (KM/HR)
(GREEN)    OUTBOUND GREEN TIME (FRACTION OF CYCLE)
(EL)       OUTBOUND LEFT TURN GREEN TIME (FRACTION OF CYCLE)
(TAU)      OUTBOUND BANDWIDTH ADVANCE (FRACTION OF CYCLE)

SIG              D DESSPEED      TLP       CS    GREEN       EL      TAU
BANKS           NA        NA       NA       NA    .6875      .15        0
PROSPECT       247        30        3       NA    .4375        0        0
BACON          337        30        3        3    .7125    .1375        0
EXCHANGE       230        30        3        3      .75        0        0
MOODY          244        30        3        3     .325        0        0
LEXINGTO       110        30        3        3    .6625     .275        0
ELM             70        30        3        3    .6625     .275        0
APPLETON       253        30        3        3      .75        0        0
LYMAN          125        30        3        3    .5875        0        0
NEWTON         104        30        3        3    .4625        0        0
LINDEN         320        30        3        3      .65       .2        0

MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE.  SCREEN WILL
 THEN BE ERASED. >  <CR>


(DBAR)     INBOUND DISTANCE FROM PREVIOUS SIGNAL TO SIGNAL (METERS)
(DESPDB)   INBOUND DESIGN SPEEDS (KM/HR)
(TLPB)     INBOUND DESIGN SPEED TOLERANCES (KM/HR)
(CSB)      LIMITS ON CHANGE IN INBOUND SPEED FROM PREVIOUS LINK (KM/HR)
(GREENBAR  INBOUND GREEN TIME (FRACTION OF CYCLE)
(ELBAR)    INBOUND LEFT TURN GREEN TIME (FRACTION OF CYCLE)
(TAUBAR)   INBOUND BANDWIDTH ADVANCE (FRACTION OF CYCLE)

SIG           DBAR   DESPDB      TLPB       CSB GREENBAR     ELBAR    TAUBAR
BANKS           NA       NA       NA       NA    .5375        0        0
PROSPECT       247       30        3       NA    .4375        0        0
BACON          337       30        3        3     .575        0        0
EXCHANGE       230       30        3        3      .75        0        0
MOODY          244       30        3        3     .325        0        0
LEXINGTO       110       30        3        3    .3875        0        0
ELM             70       30        3        3    .3875        0        0
APPLETON       253       30        3        3      .75        0        0
LYMAN          125       30        3        3    .5875        0        0
NEWTON         104       30        3        3    .4625        0        0
LINDEN         320       30        3        3      .45        0        0

MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE.  SCREEN WILL
 THEN BE ERASED. >  <CR>
```

Note that machine increase this from 10 to 15 due to left turn time availability

(PATCHOIC) LEFT TURN PATTERN FORMING MATRIX

PAT	1	2	3	4
SIG				
BANKS	1	0	1	0
PROSPECT	0	0	0	0
BACON	1	0	1	0
EXCHANGE	0	0	0	0
MOODY	0	0	0	0
LEXINGTO	1	0	1	0
ELM	1	0	1	0
APPLETON	0	0	0	0
LYMAN	0	0	0	0
NEWTON	0	0	0	0
LINDEN	1	0	1	0

(KK) DESIRED RATIO OF INBOUND TO OUTBOUND GREENBANDS

KK 1

->.1B SOLVE
MAXIMUM NUMBER OF ITERATIONS
(TYPE NC TO USE THE DEFAULT SETTING OF 100000 ITERATIONS) >NC
IS THIS A RESTART OF A PREVIOUS RUN? >NO

(DIFF1) CPU SECONDS USED DURING THE MATRIX GENERATOR

DIFF1 54 89

OPTIMIZATION FINISHED

(DIFF2) CPU SECONDS USED DURING THE OPTIMIZATION

DIFF2 1,677 79

OUTPUT VALUES IN METRIC UNITS

(ZOUT) CYCLE TIME (SEC)

ZOUT 60.00

OUTBOUND SOLUTION

(B) OUTBOUND BANDWIDTH (CYCLES)

B .24

OUTPUT: 1 TABLE ONLY 2 PLOT ONLY 3 BOTH 4 NEITHER >3
MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE. SCREEN WILL THEN BE ERASED. > <CR>

```
(ST RED)   START OF RED CYCLE
CYCLE            1         2         3         4         5
SIG
BANKS         0.00      1.00      2.00      3.00      4.00
PROSPECT       .55       1.55      2.55      3.55      4.55
BACON          .96       1.96      2.96      3.96      4.96
EXCHANGE       .91       1.91      2.91      3.91      4.91
MOODY          .94       1.94      2.94      3.94      4.94
LEXINGTO       .61       1.61      2.61      3.61      4.61
ELM            .62       1.62      2.62      3.62      4.62
APPLETON       .96       1.96      2.96      3.96      4.96
LYMAN          .04       1.04      2.04      3.04      4.04
NEWTON         .47       1.47      2.47      3.47      4.47
LINDEN         .01       1.01      2.01      3.01      4.01

MAKE HARD COPY (IF DESIRED). THEN HIT 'RETURN' TO CONTINUE.  SCREEN WILL
 THEN BE ERASED  >     <CR>

(END RED)  END OF RED CYCLE
CYCLE            1         2         3         4         5
SIG
BANKS          .31       1.31      2.31      3.31      4.31
PROSPECT      1.11       2.11      3.11      4.11      5.11
BACON         1.25       2.25      3.25      4.25      5.25
EXCHANGE      1.16       2.16      3.16      4.16      5.16
MOODY         1.62       2.62      3.62      4.62      5.62
LEXINGTO       .95       1.95      2.95      3.95      4.95
ELM            .96       1.96      2.96      3.96      4.96
APPLETON      1.21       2.21      3.21      4.21      5.21
LYMAN          .45       1.45      2.45      3.45      4.45
NEWTON        1.01       2.01      3.01      4.01      5.01
LINDEN         .36       1.36      2.36      3.36      4.36

MAKE HARD COPY (IF DESIRED). THEN HIT 'RETURN' TO CONTINUE.  SCREEN WILL
 THEN BE ERASED  >     <CR >

(ST GB)    START OF GREENBAND
(END GB)   END OF GREEN_AND
(ST ADV)   ST GB PLUS BANDWIDTH ADVANCE
(END ADV)  ST ADV PLUS GREENBAND

SIG          ST GB    END.GB   ST.ADV   END.ADV
BANKS          .62       .86      .62       .86
PROSPECT      1.11      1.35     1.11      1.35
BACON         1.73      1.96     1.73      1.96
EXCHANGE      2.18      2.42     2.18      2.42
MOODY         2.71      2.94     2.71      2.94
LEXINGTO      2.95      3.19     2.95      3.19
ELM           3.10      3.33     3.10      3.33
APPLETON      3.57      3.81     3.57      3.81
LYMAN         3.80      4.04     3.80      4.04
NEWTON        4.01      4.25     4.01      4.25
LINDEN        4.59      4.83     4.59      4.83

MAKE HARD COPY (IF DESIRED). THEN HIT 'RETURN' TO CONTINUE   SCREEN WILL
 THEN BE ERASED. >     < CR>
```

INBOUND SOLUTION

(BBAR) INBOUND BANDWIDTH (CYCLES)

BBAR .24

OUTPUT: 1 TABLE ONLY 2 PLOT ONLY 3 BOTH 4 NEITHER >3
MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE. SCREEN WILL THEN BE ERASED. > <CR>

(ST RED) START OF RED CYCLE

CYCLE	1	2	3	4	5
SIG					
LINDEN	.01	1.01	2.01	3.01	4.01
NEWTON	.47	1.47	2.47	3.47	4.47
LYMAN	04	1.04	2.04	3.04	4.04
APPLETON	.96	1.96	2.96	3.96	4.96
ELM	62	1 62	2.62	3.62	4.62
LEXINGTO	61	1.61	2.61	3.61	4.61
MOODY	.94	1 94	2.94	3.94	4.94
EXCHANGE	.91	1.91	2.91	3.91	4.91
BACON	.96	1.96	2 96	3.96	4.96
PROSPECT	.55	1.55	2.55	3.55	4.55
BANKS	0.00	1.00	2.00	3.00	4.00

MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE SCREEN WILL THEN BE ERASED. > <CR>

(END RED) END OF RED CYCLE

CYCLE	1	2	3	4	5
SIG					
LINDEN	.56	1.56	2.56	3.56	4.56
NEWTON	1.01	2.01	3.01	4.01	5.01
LYMAN	.45	1.45	2.45	3.45	4.45
APPLETON	1.21	2.21	3.21	4.21	5.21
ELM	1.23	2.23	3.23	4.23	5.23
LEXINGTO	1.23	2.23	3.23	4.23	5.23
MOODY	1.62	2 62	3.62	4.62	5.62
EXCHANGE	1.16	2.16	3.16	4.16	5.16
BACON	1.39	2.39	3 39	4.39	5.39
PROSPECT	1 11	2.11	3.11	4.11	5.11
BANKS	.46	1.46	2 46	3.46	4.46

MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE. SCREEN WILL THEN BE ERASED. > <CR>

(ST GB) START OF GREENBAND
(END GB) END OF GREENBAND
(ST ADV) ST GB PLUS BANDWIDTH ADVANCE
(END ADV) ST ADV PLUS GREENBAND

SIG	ST.GB	END.GB	ST.ADV	END.ADV
LINDEN	.56	.80	.56	.80
NEWTON	1.22	1.46	1.22	1.46
LYMAN	1.45	1.69	1.45	1.69
APPLETON	1.72	1.96	1.72	1.96
ELM	2.23	2.47	2.23	2.47
LEXINGTO	2.38	2.61	2 38	2.61
MOODY	2.62	2.86	2.62	2.86
EXCHANGE	3.16	3.40	3.16	3.40
BACON	3.64	3.88	3.64	3.88
PROSPECT	4.31	4.55	4.31	4.55
BANKS	4 76	5.00	4.76	5.00

MAKE HARD COPY (IF DESIRED), THEN HIT 'RETURN' TO CONTINUE. SCREEN WILL THEN BE ERASED > <CR>

(AVGSP) AVERAGE SPEED IN GREENBAND FROM PREVIOUS SIGNAL TO SIGNAL
(KM/HR)

SIG	AVGSP
NEWTON	29.17
LYMAN	27.00
APPLETON	27.60
ELM	29.88
LEXINGTO	29.17
MOODY	27.00
EXCHANGE	27.00
BACON	28.62
PROSPECT	30.25
BANKS	33.00

FILE CREATED 10/11/79 19:10:13
COMMENT: PLOT FOR 5 CYCLES
> <CR>

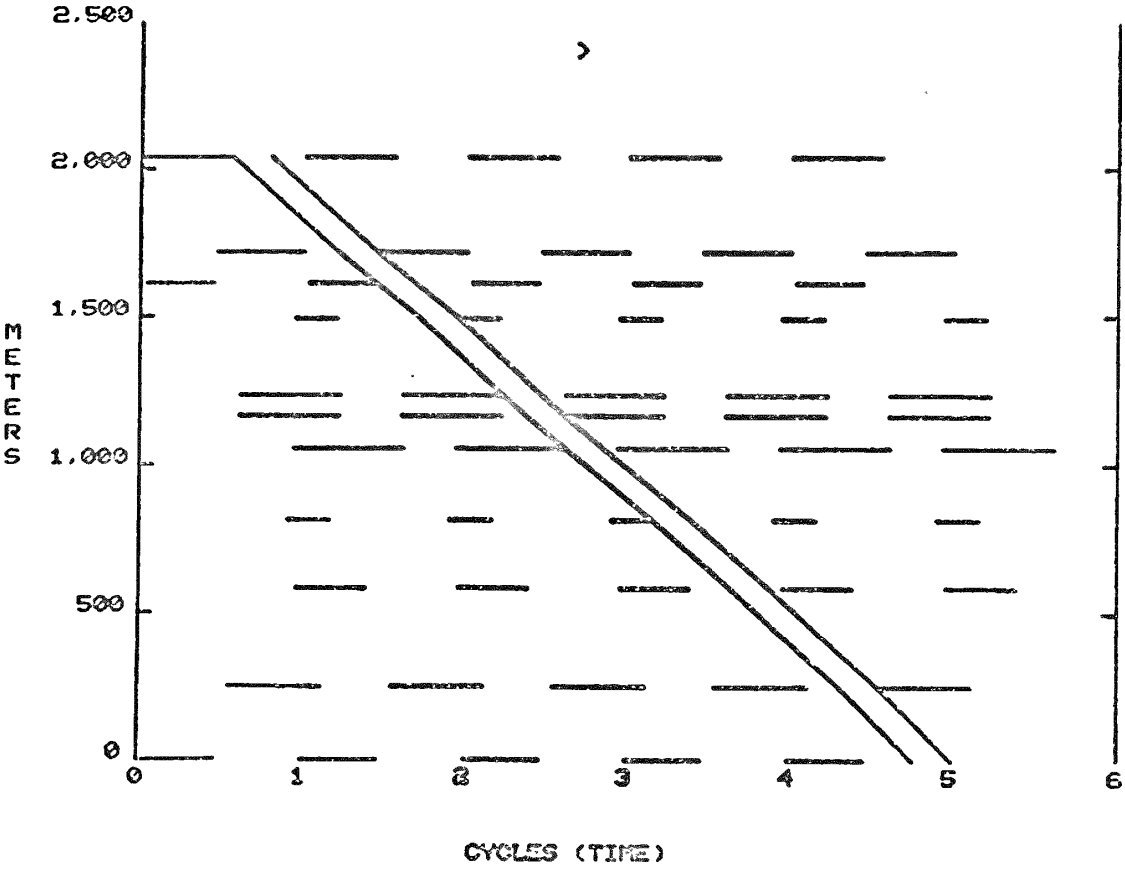

<CR>

```
(DIFF3)     CPU SECONDS USED DURING THE OUTPUT ROUTINE

DIFF3          114.82
```

```
->FILE WALTHAM DATABASE
COMMENT: >MAIN STREET, WALTHAM EXAMPLE   Save data on disk file
->USE WALT. 1
FILE CREATED: 12/02/80 13:53:20
COMMENT: MAIN STREET, WALTHAM EXAMPLE    Restore data
->QUIT              Automatic update

DATA BASE UPDATED
C>LO     Leave PRIME
L?LITTLE (2) LOGGED OUT AT  13:55 80/12/02
2053 6 MRUS, 1.93 HOURS (LOCAL), PROJECT=MATT
C>
```

REFERENCES

Land, A. and Powell, S., Fortran Codes for Mathematical Programming, London: John Wiley and Sons, 1973.

Little, John D. C., "The Synchronization of Traffic Signals by Mixed-Integer Linear Programming," Operations Research, Vol. 14, No. 4, July-August, 1966, pp. 568-594.

Little, John D. C., Maximal Bandwidth for Arterial Traffic Signals: Theory and Interactive Computation, Massachusetts Institute of Technology, Alfred P. Sloan School of Management, Working Paper WP 970-78, September 1977.

Little, John D. C. and Kelson, Mark D., "Optimal Signal Timing for Arterial Signal Systems," Report for Federal Highway Administration Under Contract DOT-FH-11-9562, April 1980.

Rizzi, W. D., "An Interactive Program for Setting Traffic Signals on an Artery," S.B. thesis, M.I.T., May 1977.

APPENDIX

MAXBAND

Standard Artery

(1) Name of artery: _____ Number of signals _____

(2) Cycle time: Lower limit _____ (seconds). Upper limit _____ (seconds).

(3) Outbound speed: Design center _____ kph / mph . Tolerance ± _____ kph / mph .

(4) Inbound speed: Design center _____ kph / mph . Tolerance ± _____ kph / mph .

(5) Target ratio of inbound to outbound band width: _____

	(6) Signal name (down = outbound)	(7) Distance from previous signal (meters / feet)	(8) Thru green outbound (fraction of cycle)	(9) Thru green inbound (fraction of cycle)	(10) Left turn green outbound (fraction of cycle)	(11) Left turn green inbound (fraction of cycle)	(12) Acceptability of Left Turn Patterns (1 = acceptable, 0 = not): Outbound LT before green and inbound LT before green (a)	Outbound LT before green and inbound LT after green (b)	Outbound LT after green and inbound LT before green (c)	Outbound LT after green and inbound LT after green (d)
1		xxx.xxx								
2										
3										
4										
5										
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										

Notes by item number: (3) (4) If no tolerance specified, ±10% is assumed as a default. A limit on change in speed between signals equal to the tolerance is assumed. (5) Actual ratio will be target ratio unless larger band width is at its limit and smaller can be further increased, in which case it will be. (12) If only outbound has left turn phases, fill in (a) and (c); if only inbound, (a) and (b). Other columns are 0.

MAXBAND

Symmetric Artery

(1) Name of artery:_____ Number of signals_____

(2) Cycle time: Lower limit_____(seconds). Upper limit_____(seconds)

(3) Speed: Design center_____(kph / mph). Tolerance ± _____(kph / mph)

	(4) Signal name (down = outbound)	(5) Distance from previous signal (meters / feet)	(6) Green time (fraction of cycle)
1		xxxxxxxx	
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			

Notes by item number: (3) If no tolerance is specified ± 10% of design speed is assumed. A limit on change of speed between signals equal to the tolerance is assumed.

MAXBAND

General Artery

(1) Name of artery:_____ Number of signals _____

(2) Cycle time: Lower limit _____(seconds). Upper limit_____(seconds).

(3) Target ratio of inbound to outbound band width: _____

(4) Maximum number of iterations _____

OUTBOUND DATA

	(5) Signal name (down = outbound)	(6) Outbound distance from previous signal (meters / feet)	(7) Outbound design speed from previous signal (kph / mph)	(8) Outbound speed tolerance in (7) ± (kph / mph)	(9) Limit on outbound speed change from previous link ± (kph / mph)	(10) Thru green outbound (fraction of cycle)	(11) Left turn green for outbound (fraction of cycle)	(12) Outbound band advance for queue clearance (fraction of cycle)
1		xxxxxx	xxxxx	xxxxx	xxxxx			
2					xxxxx			
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								

Notes by item number: (3) Actual ratio will be target ratio unless smaller band can be further increased after larger has reached its limit. (4) Default = 10,000. (7) Default is all speeds equal. (8) Default is ± 10% of design speed. (9) Default is speed tolerance of (8).

(22) Name of Artery: _____

LEFT TURN PATTERN CONSTRAINTS

(23)	(24)			
	Acceptability of Left Turn Patterns (1 = acceptable, 0 = not)			
	Outbound LT before green and		Outbound LT after green and	
Signal name (down = outbound) (same as page 1)	inbound LT before green (a)	inbound LT after green (b)	inbound LT before green (c)	inbound LT after green (d)
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				

Notes: (24) Default condition is that all left turn patterns are acceptable. If only outbound has left turn phases, fill in (a) and (c); if only inbound, (a) and (b). Other columns are 0.